
	4	3	\neg
ITEM	DESCRIPTION	MATERIAL	QTY
1	GROOVED END PIPE (AWWA C606 STANDARD)	METALLIC/NON METALLIC	2
0	COUPLING HOUSING	CE8MN/CE3MN (DUPLEX/SUPERDUPLEX	
2		STAINLESS STEEL)	2
3	GASKET	EPDM RUBBER	1
4	ROUND HEAD, SQUARE NECK BOLT	316 STAINLESS STEEL	2
5	WASHER	316 STAINLESS STEEL	2
6	HEAVY HEX NUT	SILICON BRONZE/316 STAINLESS STEEL	2

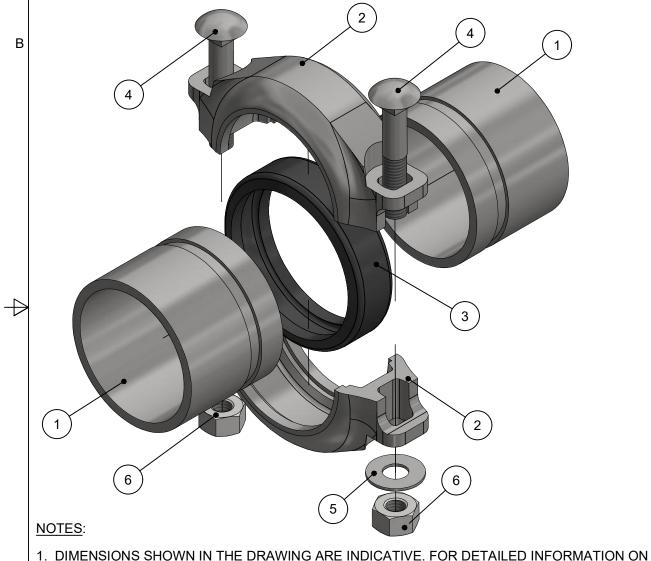

Α

Α

2

Υ


PRESSURE RATING:

×

NOMINAL SIZES	RATED PRESSURE	PROOF TEST PRESSURE
0.75" - 4"	1500 PSI (103 BAR)	2250 PSI (155 BAR)

DIMENSIONS:

NOMINAL SIZE	Х	Y	Z	dk	R1	R2	Rk	APPROX. WT		
INCH	INCH [MM]	INCH [MM]	INCH [MM]	INCH [MM]	INCH [MM]	INCH [MM]	INCH [MM]	LB [KG]		
3/4	2.00 [50.8]	3.20 [81.3]	1.71 [43.4]	1.37 [34.8]	0.81 [20.5]	0.54 [13.6]	0.48 [12.1]	1.10 [0.50]		
1	2.40 [61.0]	3.50 [88.8]	1.71 [43.4]	1.37 [34.8]	1.00 [25.4]	0.67 [16.9]	0.60 [15.2]	1.16 [0.53]		
1-1/4	2.72 [69.1]	3.74 [95.0]	1.71 [43.4]	1.35 [34.3]	1.11 [28.2]	0.85 [21.6]	0.77 [19.6]	1.53 [0.70]		
1-1/2	3.04 [80.0]	4.17 [105.9]	1.71 [43.4]	1.35 [34.3]	1.23 [31.2]	0.98 [24.9]	0.90 [22.7]	1.57 [0.71]		
2	3.50 [88.9]	4.81 [122.2]	1.79 [45.5]	1.35 [34.3]	1.47 [37.3]	1.21 [30.7]	1.13 [28.7]	2.44 [1.11]		
2-1/2	3.92 [99.6]	5.38 [136.5]	1.85 [47.0]	1.35 [34.3]	1.72 [43.7]	1.46 [37.0]	1.37 [34.7]	2.79 [1.27]		
3	4.70 [119.4]	6.23 [158.2]	1.85 [47.0]	1.35 [34.3]	2.03 [51.6]	1.78 [45.2]	1.68 [42.7]	3.59 [1.63]		
4	5.90 [149.7]	7.40 [180.0]	2.02 [51.3]	1.50 [38.1]	2.64 [67.1]	2.28 [57.9]	2.17 [55.2]	6.08 [2.76]		
APPVD	UNLESS NOTED OTHERWISE WITEPRETATOR MAILYS COLEMACE TOLERANCES 40 07 10 75 MII MAILES 41 070 17 FMII HOLE BALL HOLE						STYLE S COUPLING ASSEMBLY SCALE: UNIT: DRAWING NO. SHEET: REVISION: N/A INCH 1.0 1.0 1.0			
	SURFACE	FINISH ON O-RING: 32 T SCALE PRINTS					MM]	1.0 1.0		

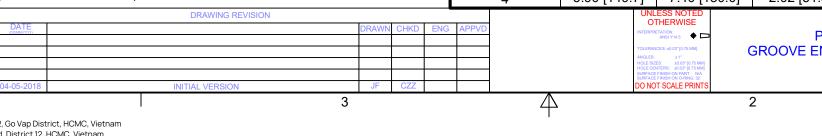

Headquarter: 54/18 Bui Quang La, Ward 12, Go Vap District, HCMC, Vietnam Office: 77 DHT10B, Dong Hung Thuan Ward, District 12, HCMC, Vietnam Phone: (028) 6258 5368 - (028) 6291 9568 Email: info@atswatertechnology.com Website: www.atswatertechnology.com

GD&T, CONTACT PIEDMONT А


ATS WATER TECHNOLOGY


ROPRIETARY AND CONFIDENTIAL NOTE:

IE INFORMATION CONTAINED IN THIS DRAWING IS IE SOLE PROPERTY OF PIEDMONT PACIFIC. IV REPRODUCTION IN PART OR AS A WHOLE WITHOUT IE WRITTEN PERMISSION OF PIEDMONT PACIFIC IS

- COUPLING IS RATED FOR SCH. 40 PIPE (OR THICKER) WITH CUT GROOVES ONLY
 HOUSING MATERIAL IS DUPLEX (CE8MN) OR SUPER DUPLEX (CE8MN/CE3MN) STAINLESS STEEL, CONFORM TO ASTM A995/A995M-13 4. BOLTS ARE ROUND HEAD, SQUARE NECK, 316SS BOLTS, CONFORM TO ASME B18.5-2012
- 5. NUTS ARE HEAVY HEX SILICON BRONZE/316SS, CONFORM TO ASME/ANSI 18.2.2-1987
- 6. WASHERS ARE 316SS, CONFORM TO ASME 18.21.1-2009
- 7. GASKETS ARE EPDM RUBBER (FLUSH-FIT/C-SHAPE)

4





SECTION A-A



ATS WATER TECHNOLOGY

В

 \triangleleft